



TRADITIONAL ✓ LONG STRIP ✓

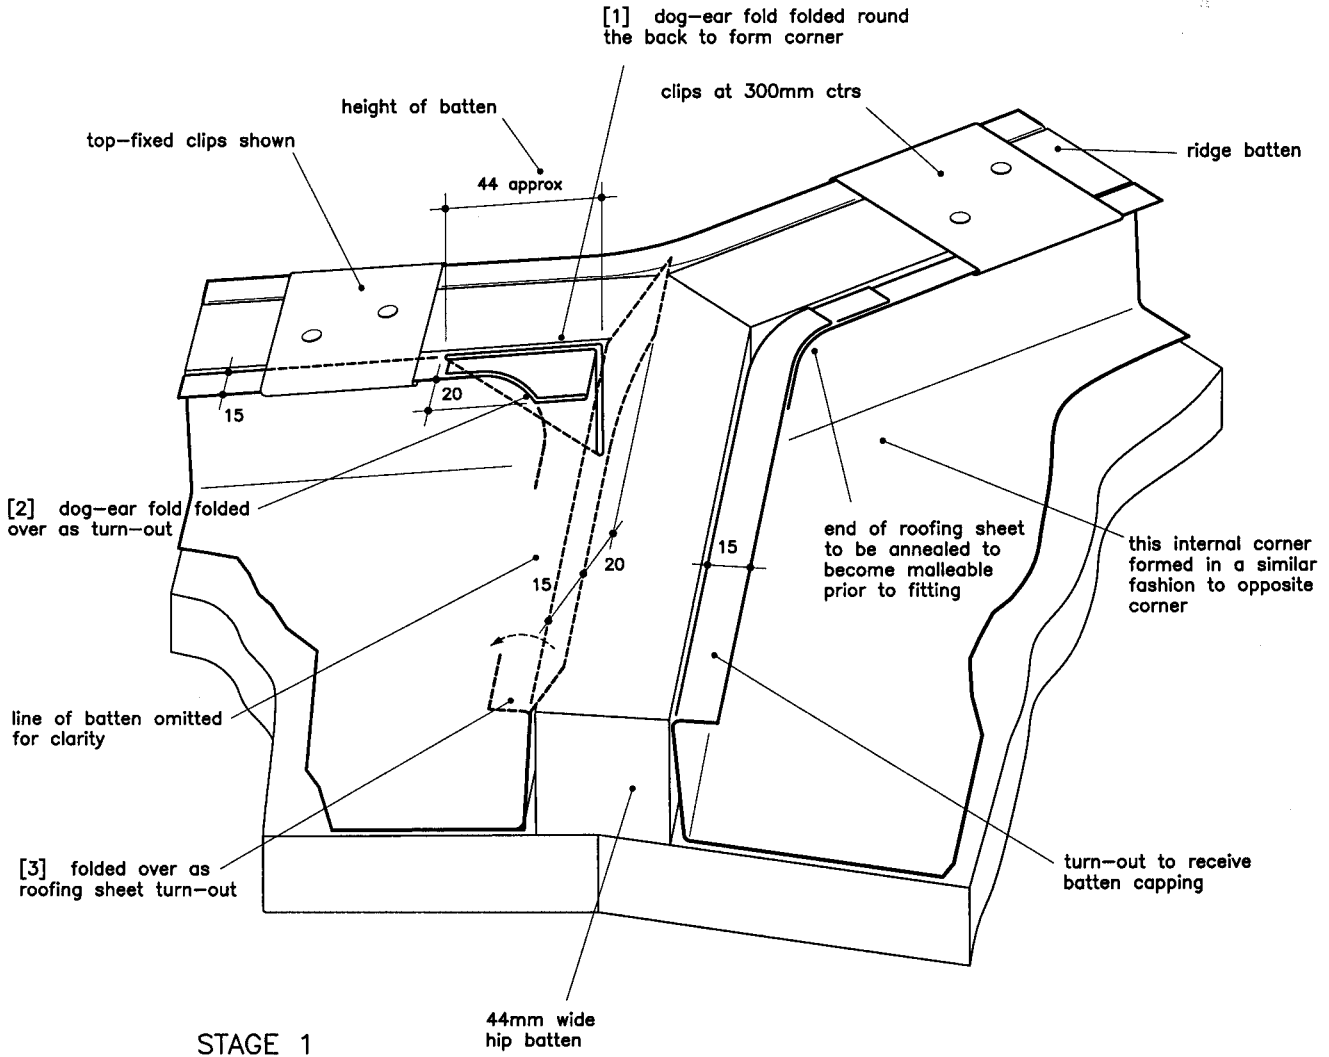


- * In all but the most exposed situations, the top layer of the dog-ear fold folded over in [2] can be snipped off. This reduces the number of copper thicknesses to be worked and therefore makes the job easier.
- * The detail can also be used in Long Strip roofing, the only difference being the allowance for movement shown in Fig 48b opposite.
- * Ridge and hip battens are often used with double-lock standing seam roofing as shown in Fig 19 (p60).
- * As far as the setting out of roofing bays is concerned, both batten roll and double-lock standing seams can line up on either side of the batten ridge or hip.
- * Joints in cappings are covered with Fig 23 (p64) and in Fig 12b (p48).

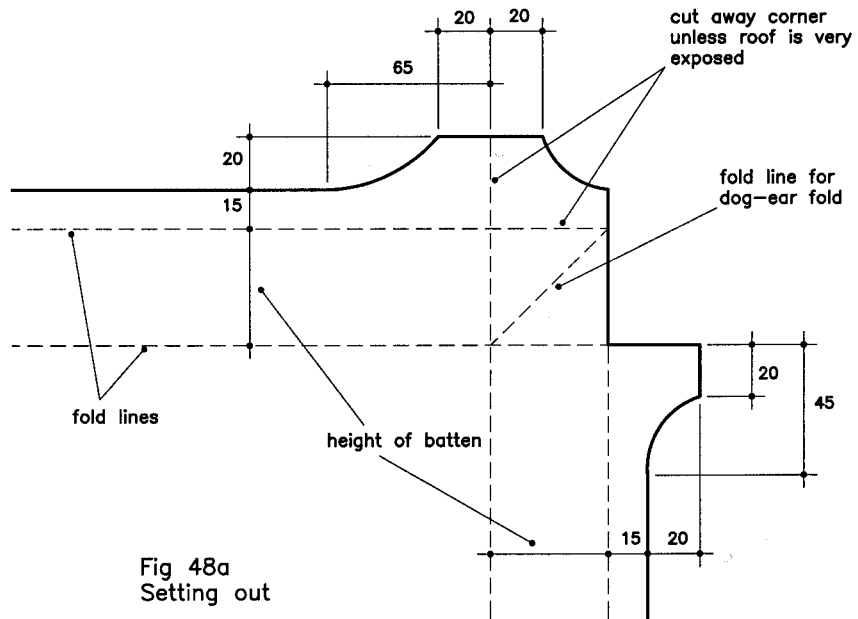

Temper: soft or quarter-hard preferably. Half-hard is possible but more difficult to work neatly in this situation.
 Thickness: 0.6mm or 0.7mm

Fig 48a Setting out

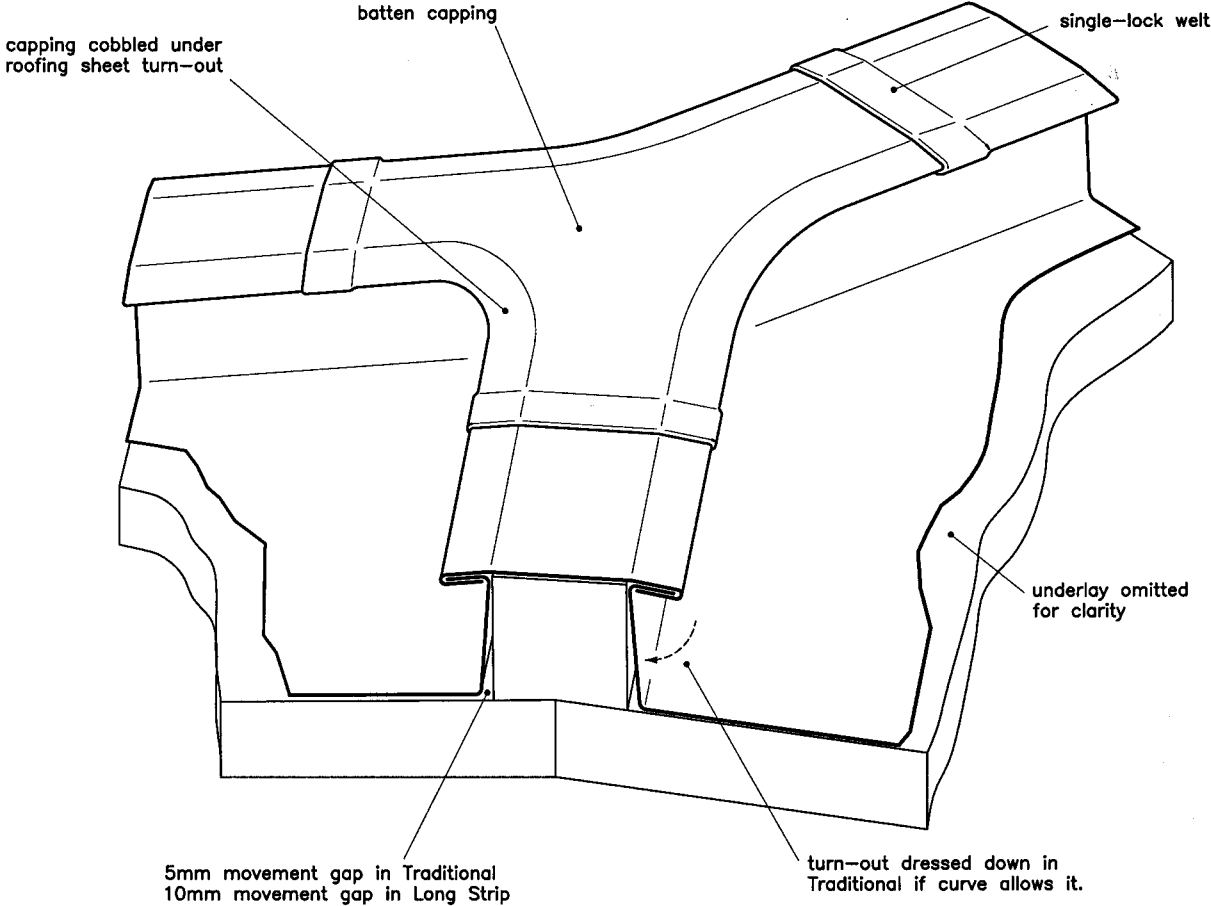

STAGE 2

